990-0607D-001 Release Date: 11/2021


Basic Rack PDU for Blade Servers AP7555A

Overview

The APC Basic Rack Power Distribution Unit (PDU) for Blade Servers distributes power to devices in the rack.

Outlets: The PDU has six (6) IEC-320-C19 outlets and three (3) IEC-320-C13 outlets.

Power cord: The 6-ft (1.82-m) power cord terminates with an IEC-309 32 A connector.

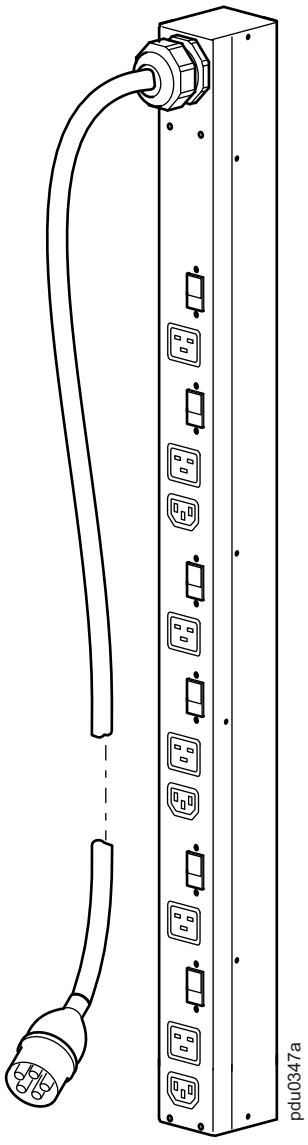

APC
70 Mechanic Street
02035 Foxboro, MA
USA

www.apc.com

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2021 Schneider Electric. APC and the APC logo are trademarks of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

Specifications

Electrical	
Input connector	IEC-309, 32 A connector
Output connectors	(3) IEC-320-C13 (6) IEC-320-C19
Overload protection	(6) 16-A single-pole breakers
Max output current (outlet)	10 A-IEC-320-C13 16 A-IEC-320-C19
Max output current (phase)	32 A
Cord length	6.00 ft (1.82 m)
Nominal input voltage	230 VAC, 3-phase
Acceptable input voltage	±10% of nominal voltage
Input frequency	47–63 Hz
Physical	
Dimensions (H × W × D)	36.50 × 2.16 × 3.46 in (92.71 × 5.48 × 8.78 cm)
Shipping dimensions (H × W × D)	41.50 × 11.25 × 2.75 in (105.41 × 28.57 × 6.98 cm)
Weight	11.45 lb (4.27 kg)
Shipping weight	14.75 lb (5.50 kg)
Environmental	
Elevation (above MSL)	
Operating	10,000 ft (3000 m)
Storage	50,000 ft (15 000 m)
Temperature	
Operating	23 to 140°F (–5 to 60°C)
Storage	–13 to 149°F (–25 to 65°C)
Humidity	
Operating	5–95%, non-condensing
Storage	5–95%, non-condensing
Approvals	
Safety Certification	UL-EU, CE, RCM, EAC, UKCA